


# DS-2CE15A2P(N)-VFIR3


## 700TVL Vari-focal IR Bullet Camera

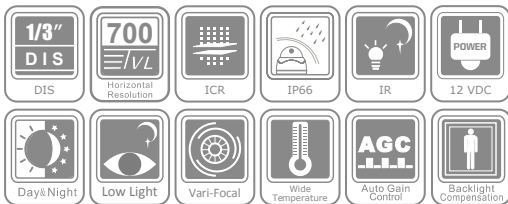

### Key features

- 1/3" DIS
- True Day/Night
- 700 TVL horizontal resolution
- 2.8 ~ 12mm vari-focal lens
- 40m IR distance
- Wide operating temperature range

### Dimensions

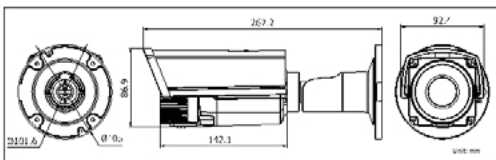

DS-2CC15A2P(N)-VFIR3	
Camera	
Image Sensor	1/3" DIS
Signal System	PAL/NTSC
Effective Pixels	976 (H) × 496 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON), 0 Lux with IR 0.14 Lux @ (F1.4,AGC ON), 0 Lux with IR
Shutter Speed	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s
Lens	2.8 - 12 mm @ F1.4
	Angle of view: 80° - 27.2°
Lens Mount	φ14
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	700 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC);
S/N Ratio	More than 62 dB
General	
Working Temperature/ Humidity	-40 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC ± 10%
Power Consumption	Max. 4 W (Max. 5W with IR cut filter on)
Ingress Protection	IP66
IR Range	Approx. 30 to 40 meters
Dimension	105 × 86.9 × 267.2mm(φ 4.13" × 3.42" × 10.52")
Weight	1350g (2.97 lbs)

### Available models

PAL: DS-2CE15A2P-VFIR3  
NTSC: DS-2CE15A2N-VFIR3

### Accessories



pole mount  
DS-1215ZJ